

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 34 TWN. 16_N RNG. 4_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 5-18-09
Party Chief: Wilcoxon
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 5-3-1974
IN S.P.C. E Zone, NAD 83
Name: 16043401
N: 504 976.391 4(m)
E: 64 316.854 1(m)

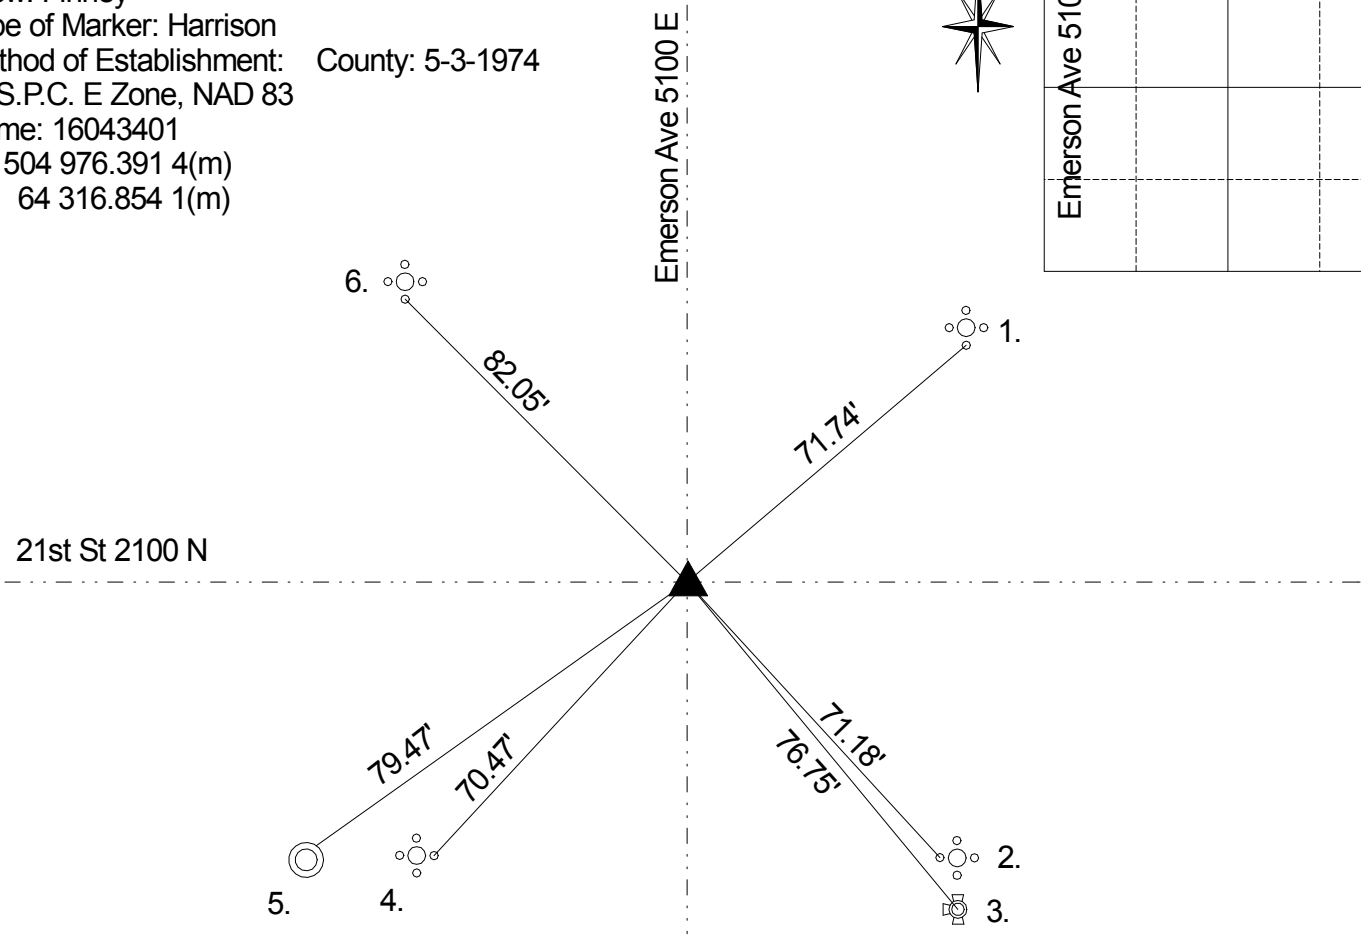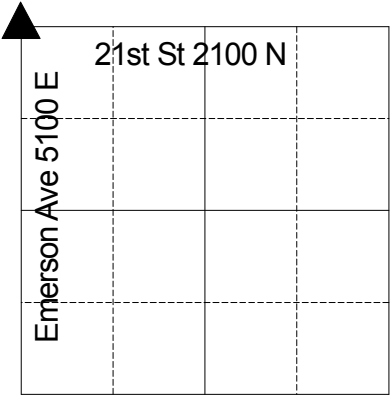

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 20” beech bearing S 65 E 30 and a 10” dogwood bearing N 62 W 16 (M.C. Atlas p. 11). A survey by H. Blount on June 11, 1910 indicates a stone set with no witnesses (Center legal Book. P. 14). Corner referenced by MCS at an unknown date and called an iron bolt. Corner referenced by SeFranka on 2/4/70 and called a brass plug. Corner referenced by McLand on 5/3/74 and called a brass plug. Corner referenced by Wilcoxon on 3/5/76 and called a brass plug. Corner referenced by Kiste on 9/27/95 and called a brass plug. Corner referenced by Kiste on 5/9/2000 and called a brass plug. Corner referenced by Kiste on 9/1/05 and called a brass plug. Corner excavated by Wilcoxon on 5/14/09 and a # 205 cast iron Harrison monument was set in position of the brass plug in steel box.

REF.	DISTANCE	DESCRIPTION
1.	71.74'	Cut 'x' S bolt street signal base
2.	71.18'	Cut 'x' W bolt street signal base
3.	76.75'	Top nut fire hydrant
4.	70.47'	Cut 'x' E bolt street signal base
5.	79.47'	Cut 'x' NE rim edge of signal manhole
6.	82.05'	Cut 'x' S bolt street signal base